



Test Procedure for the NV47701PDAJGEVB Evaluation Board

Test Procedure:

1. Connect the test setup as is shown in **Figure 1**. See **Table 1** with required equipment.
 - Letter **F** – Force line
 - Letter **S** – Sense line
2. Select output current limit by connecting jumper **J₅** – **J₈**.
 - **J₅** – $I_{LIM0} \sim 10 \text{ mA}$
 - **J₆** – $I_{LIM1} \sim 170 \text{ mA}$
 - **J₇** – $I_{LIM2} \sim 340 \text{ mA}$
 - **J₈** – I_{LIM3} – R_{CSO3} position available for individual current limit setting by resistor from range 728Ω to $25.5 \text{ k}\Omega$
3. Set Input Voltage and turn on Power Supply.
4. Enable chip by connecting jumper **J₃** to V_{in} or by external Voltage Source. Output Voltage must be higher than 3.5 V .
5. Set load current (max 350 mA) and turn on Load.
6. Monitor Output voltage, it's given according to Equation 1.

$$V_{out} = 1.275 \left(1 + \frac{R_1}{R_2} \right) \quad (\text{eq. 1})$$

7. Monitor CSO voltage on connector **J₄**. It should be max 2.55 V in steady state. The CSO voltage is proportional to output current according to Equation 2.

$$V_{CSO} = I_{out} \left(R_{CSO} \times \frac{1}{100} \right) \quad (\text{eq. 2})$$

8. Compare your results with measured results in **Table 2**.

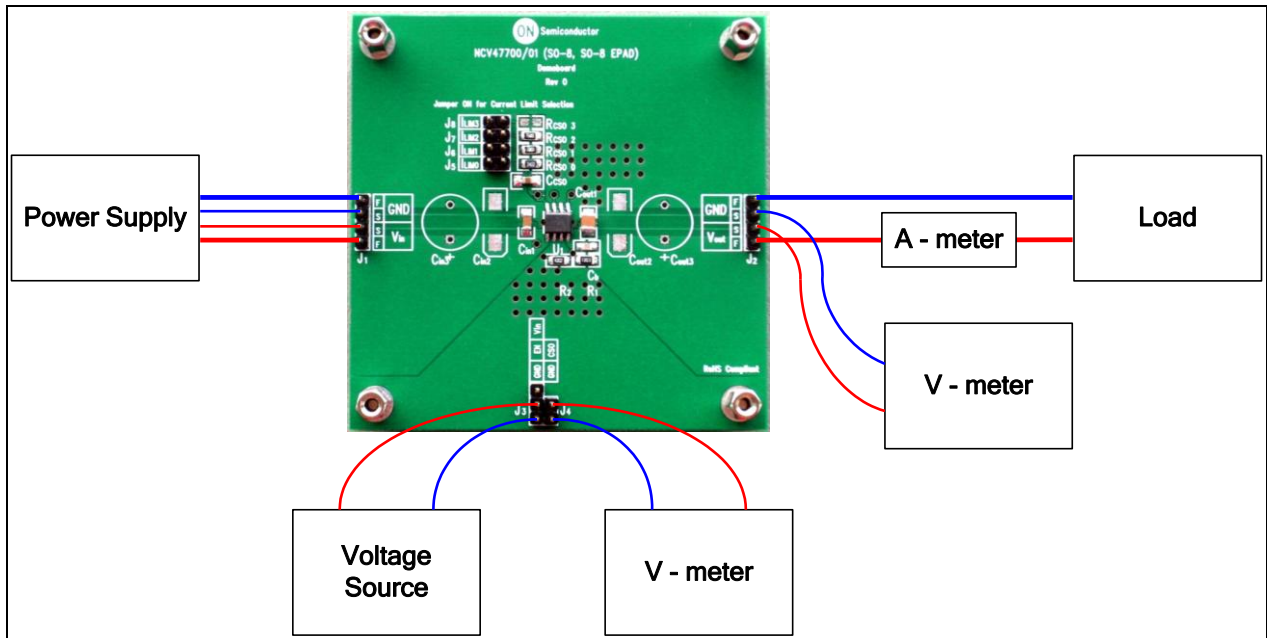


Figure 1. Test Setup

Table 1: Required Equipment

| Equipment | Ranges |
|----------------|---------------------|
| Power Supply | 0 V – 45 V / 500 mA |
| Voltage Source | 0 V – 45 V |
| Load | 0 mA – 500 mA |
| V - meter | 0 V – 20 V |
| A - meter | 0 mA – 500 mA |

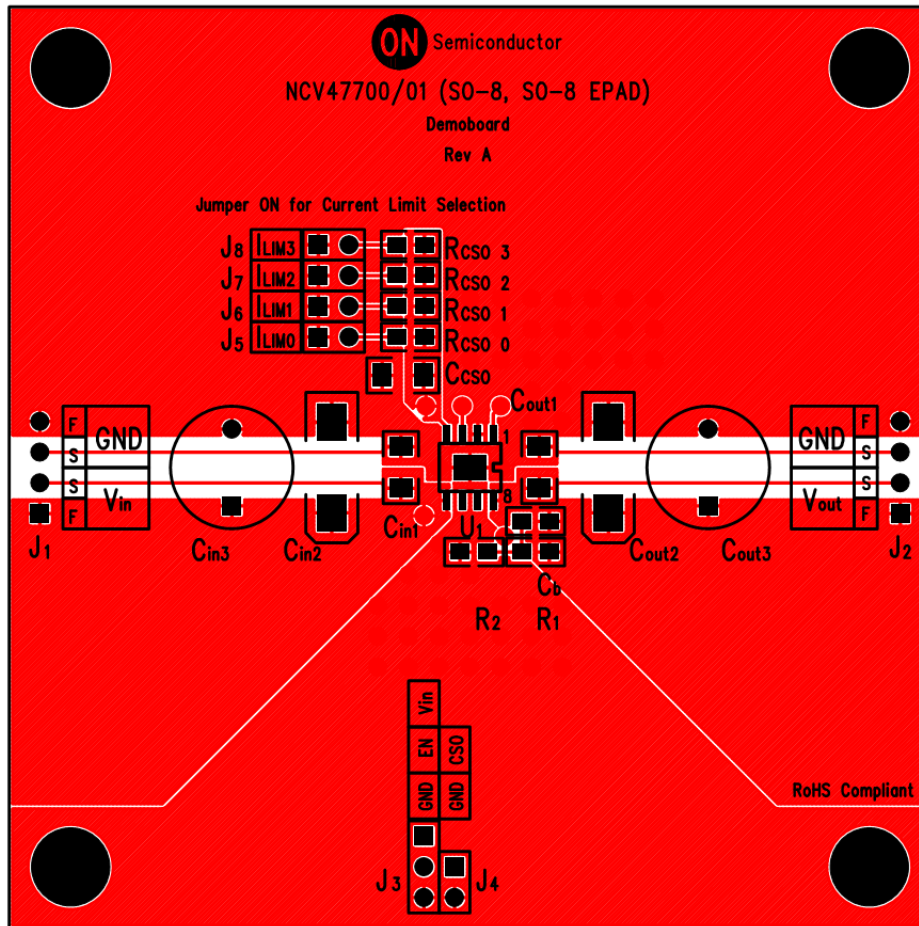


Figure 2. PCB Layout

Table 2: Measured Results

| Parameter | Test Conditions | Value | | Unit |
|----------------|--|---------|----------|------|
| | | Nominal | Measured | |
| Output Voltage | $V_{in} = 13.5\text{ V}$, $V_{out_nom} = 5.02\text{ V}$, $I_{out} = 5\text{ mA}$, $R_{CSO} = \text{Short to ground}$ | 5.02 | 5.03 | V |
| | $V_{in} = 13.5\text{ V}$, $V_{out_nom} = 5.02\text{ V}$, $I_{out} = 350\text{ mA}$, $R_{CSO} = \text{Short to ground}$ | 5.02 | 5.04 | |
| Output Current | $V_{in} = 13.5\text{ V}$, $V_{out_nom} = 5.02\text{ V}$, $V_{out} = 0\text{ V}$, $R_{CSO} = 25.5\text{ k}\Omega$ | 10 | 10.45 | mA |
| | $V_{in} = 13.5\text{ V}$, $V_{out_nom} = 5.02\text{ V}$, $V_{out} = 0\text{ V}$, $R_{CSO} = 1.5\text{ k}\Omega$ | 170 | 175.6 | |
| | $V_{in} = 13.5\text{ V}$, $V_{out_nom} = 5.02\text{ V}$, $V_{out} = 0\text{ V}$, $R_{CSO} = 750\text{ }\Omega$ | 340 | 353 | |