# **SPECIFICATIONS**


"Preliminary data"

 Model Number:
 CR0412MB-D51
 Version:

 Part Number:
 17000172A
 Apr 11, 2017



### **Mechanical Drawing:**

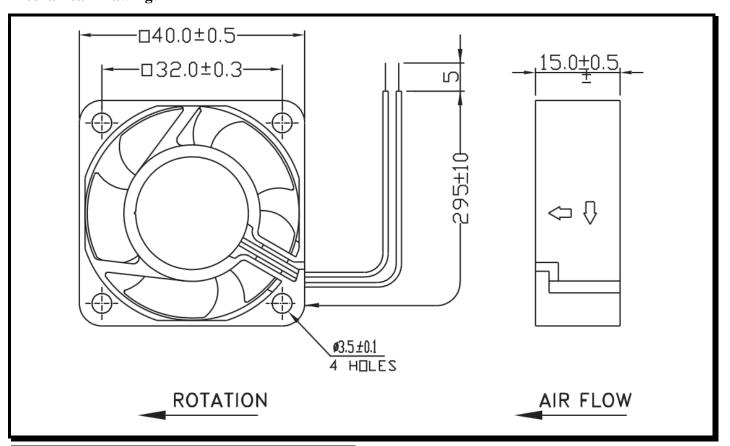

#### Motor:

Nominal Voltage = 12 VDC Nominal Running Current = 0.09 AmpsPower Input = 1.08 Watts Speed = 7000 RPMBearings = BallAir Flow = 7.60 CFMStatic Pressure: = 0.20 Inch of H2O Acoustic  $= 31.8 \, dB(A)$ 

**Construction:** 

Weight

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

### **Life Expectancy:**

This fan is designed for continuous duty life of 70,000

= 27.0 g

hours at 40°C.

## **Additional Features**:

Brushless DC Motor Locked Rotor Protection Polarity Protected

**Automatic Restart Capability** 

Operating Temperature: -10° C to 70° C Storage Temperature: -40° C to 70° C

#### **Termination:**

 $295\pm10$  mm Lead wires, AWG 26, UL 1007

**Agency Approvals:** UL, CUL, TUV, CE